

Mono

120cells

(315~335 Watt)



Those who dream of a better future can help lead to a more meaningful and enriched world. As a leading solar module manufacturer in Korea, we never stop to achieve competitiveness through differentiation, implement the maximum value, and commit to sustainable development with customers.

Certificates



Quality

ISO 9001:2015 ISO 14001:2015
OHSAS 18001:2007 ISO/TS 16949:2009
Bankability Tier1 PV module manufacturer



Product

IEC 61215 / IEC 61730 : TUV / CE
UL 1703 Fire Rating Type1
UL790 Fire Rating Class C
Assembled in Korea

Key Features



Linear Performance Warranty

12 Years product warranty
25 Years linear performance warranty



1,500V

Designed for UL and IEC 1,500V
Saving BoS costs



Certified Durability

5,400 Pa snow load
2,400 Pa wind load

Optional Features



Perfect Black

Black anodized frame
Black back sheet
Black string ribbon



Floating PV Installation

Module backside blocks moisture permeability

Mono-Crystalline Solar Module (UB-HH2)

120cells (315~335 Watt)

Electrical Data / STC (UB-HH2) : Irradiance of 1000W/m², spectrum AM 1.5 and cell temperature of 25 °C

Model		HS315UB-HH2	HS320UB-HH2	HS325UB-HH2	HS330UB-HH2	HS335UB-HH2
Nominal Max Power	Pmax(Wp)	315	320	325	330	335
Voltage at Pmax	Vmp(V)	34.7	34.9	35.1	35.3	35.5
Current at Pmax	Imp(A)	9.08	9.17	9.26	9.35	9.44
Open Circuit Voltage	Voc(V) ±3%	40.8	41.0	41.2	41.4	41.6
Short Circuit Current	Isc(A) ±3%	9.68	9.77	9.86	9.95	10.04
Module Efficiency	%	18.40%	18.69%	18.98%	19.28%	19.57%
Operating Temperature		-40 °C ~ +85 °C				
Max. System Voltage		1500 Vdc				
Max. Series Fuse Rating		20A				
Max. Reverse Current		20A				
Power tolerance		-0 ~ +5W				

Electrical Data / NOCT (UB-HH2) : Irradiance of 800W/m², spectrum AM 1.5 and Ambient Temperature 20 °C, wind speed 1m/s

		234.0	237.6	241.2	244.8	248.5
Nominal Max Power	Pmax(Wp)	234.0	237.6	241.2	244.8	248.5
Voltage at Pmax	Vmp(V)	31.9	32.1	32.2	32.4	32.6
Current at Pmax	Imp(A)	7.34	7.41	7.48	7.55	7.62
Open Circuit Voltage	Voc(V)	38.0	38.2	38.4	38.6	38.7
Short Circuit Current	Isc(A)	7.81	7.88	7.95	8.02	8.10

Mechanical Data

Cell Type	Mono-crystalline, 6 inch
Cell Arrangement	120 Half Cell (6x20)
Dimensions	1695 x 1010 x 35mm (66.73 x 39.76 x 1.38in)
Weight	18.7kg (41.2 lbs)
Stand. Packaging	29pcs (Vertical)
Module Pieces per Container	754pcs
Pallets per Container	26
Frame	Anodized aluminum
Front Glass	3.2mm Tempered glass
J-Box	IP68, 3 diodes
Output Cable	(+)1000mm(39.37in), (-)1000mm(39.37in), 12AWG
Connectors	QC4.10-35
Module Fire Performance	Type 1 / Class C


Warranties

Product	12 years
Performance	25 years linear power warranty (>82.2%)


Temperature Characteristics

Specifications	Data
Temperature coefficient (Pmax)	-0.35
Temperature coefficient (Voc)	-0.27
Temperature coefficient (Isc)	0.04
Normal Operating Cell Temperature	45.1±2 °C

MODULE DIAGRAM unit : mm(inch)

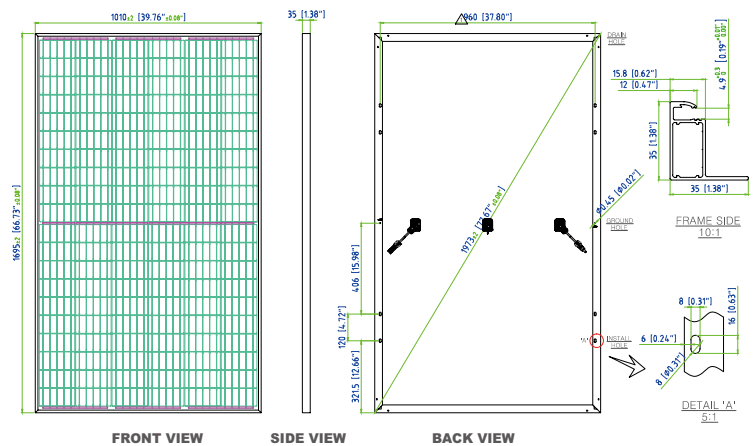

I-V Curve according to Irradiance

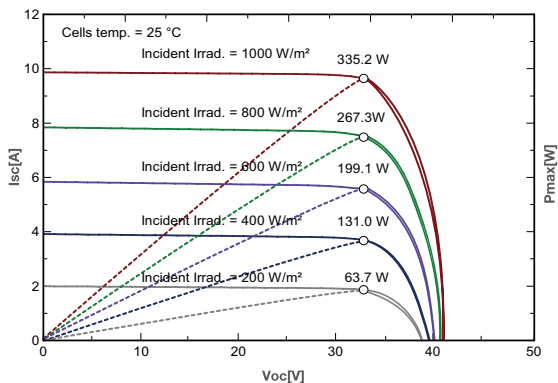

140, Gwahaksanup 1-ro, Oksan-myeon, Heungdeok-gu,
Cheongju-si, Chungcheongbuk-do 28122, Korea
Tel : +82-43-219-3462, Fax : +82-43-219-3410
E-mail : solar@hansol.com
http://solar.hansoltechnics.com

